

# COIL WINDING

## GROUP WINDING HEADS

### MODEL 5,10,11,12

#### EASY SETUP

Winding figures are set up to proper coil dimensions by direct reading scales on each bar. Coil size change-over can be accomplished in a few minutes.

#### REMOVE COILS

A single action cam collapse mechanism instantly releases the tension of the fingers which allows quick removal of all coils, plus rapid repositioning of the fingers for another winding.

#### CROSS BRACES

Slotted braces support fingers and hold them parallel when winding heavy coils.

#### CONSISTENT ACCURACY

Duplicate coils of the same dimension permits rapid insertion eliminating time lost by unnecessarily reshaping or forming coils.


#### STURDY CONSTRUCTION

Cast base for mounting on a face plate. Machined to close tolerance component parts for rugged life-time service.

#### TYPES OF COILS

Mush type diamond shaped coils for 3 phase motors.

MODEL	RANGE OF COIL SIZES			SLOT SPECIFICATIONS		
	LENGTH	WIDTH	SLOT LENGTH	QTY.	WIDTH	DEPTH
NO. 5	5- 11 1/2	2-6 1/2	2 1/4 - 6	6	5/16	3/8
NO. 10	5 3/4- 20	3 - 10	3 1/2- 13	6	3/8	1/2
NO. 11	5 3/4- 24	3 - 14	3 1/2- 18	6	1/2	1
NO. 12	5 3/4- 36	3 - 24	3 1/2- 29	6	1/2	1

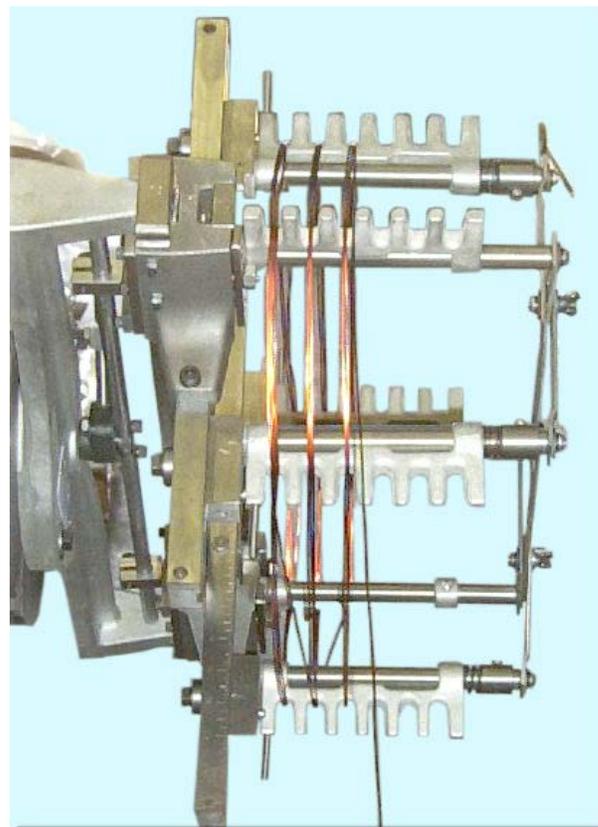

#### CAPACITY

Fractional to large motor sizes.

#### PHYSICAL DIMENSIONS

##### MODEL NO. 5

Dimensions 12"L x 8"W x 12"H

Net Weight 29 Lbs.

Gross Weight 46 Lbs.

##### MODEL NO. 10

Dimensions 21"L x 13"W x 13"H

Net Weight 50 Lbs.

Gross Weight 80 Lbs.

##### MODEL NO. 11

Dimensions 24"L x 16"W x 13"H

Net Weight 55 Lbs.

Gross Weight 90 Lbs.

##### MODEL NO. 12

Dimensions 39"L x 29"W x 13"H

Net Weight 100 Lbs.

Gross Weight 150 Lbs.



**ACE EQUIPMENT COMPANY**  
**4725 MANUFACTURING ROAD**  
**CLEVELAND, OHIO 44135**  
**WWW.ARMATURECOIL.COM**  
**800-255-1241 • 216-267-6366 • FAX 216-267-4361**